

FOOTPRINT FOR TC2030 PLUG-OF-NAILS^(TM) CABLE

REV

No-Legs Version


12/05/19

MS/NS

Notes:

1. No tracks or vias in the shaded "KEEP OUT" AREA.
2. No other track or signal within 0.020" of any contact pad.
3. Do not allow solder paste on the contact pads. It is essential to eliminate any hole in the solder paste-mask (solder stencil) layer. If this is not possible make the contact pads thru-hole with finished hole size of 0.008" or less.
4. To avoid ordering confusion, please specify DNL in your BOM.

5. The TC2030-CLIPboard can attach to the three alignment pins from underneath the PCB to temporarily retain the cable in place.

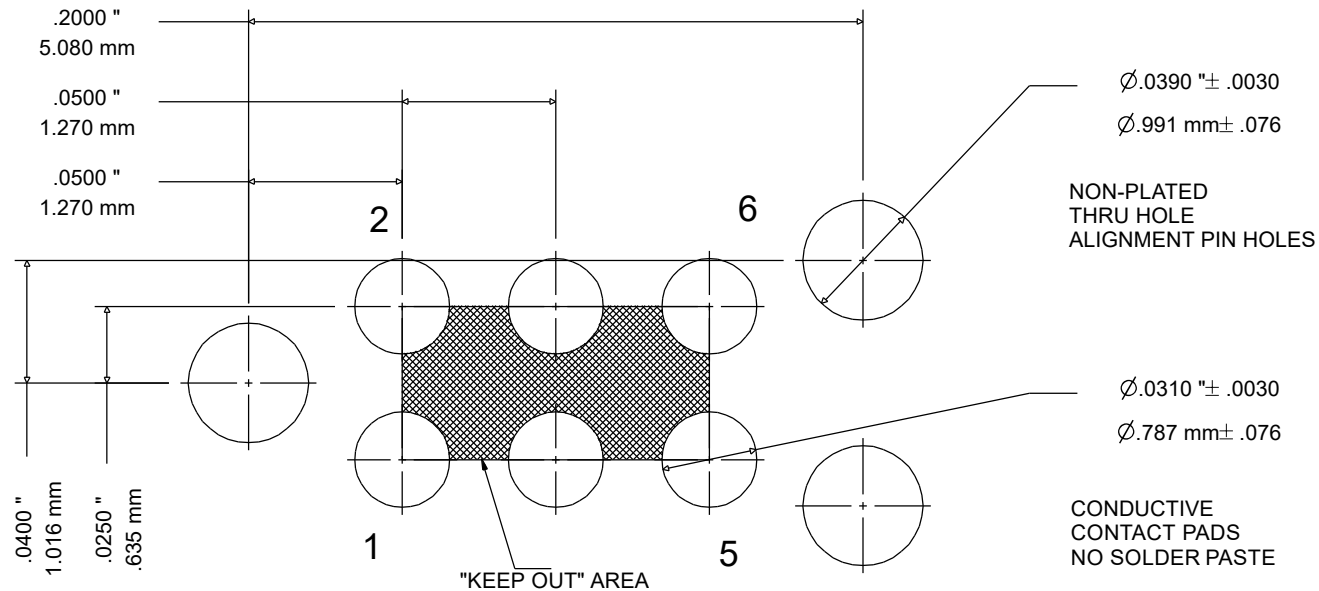

PCB TOP LAYER

SIZE
A

FSCM NO.

DWG NO.

FOOTPRINT FOR
TC2030 (No-Legs)

REV
B

SCALE 11:1

www.TAG-CONNECT.com

SHEET 1 Of 3